



VERDERFLEX VF125 Technical Data Sheet

Performance Curve

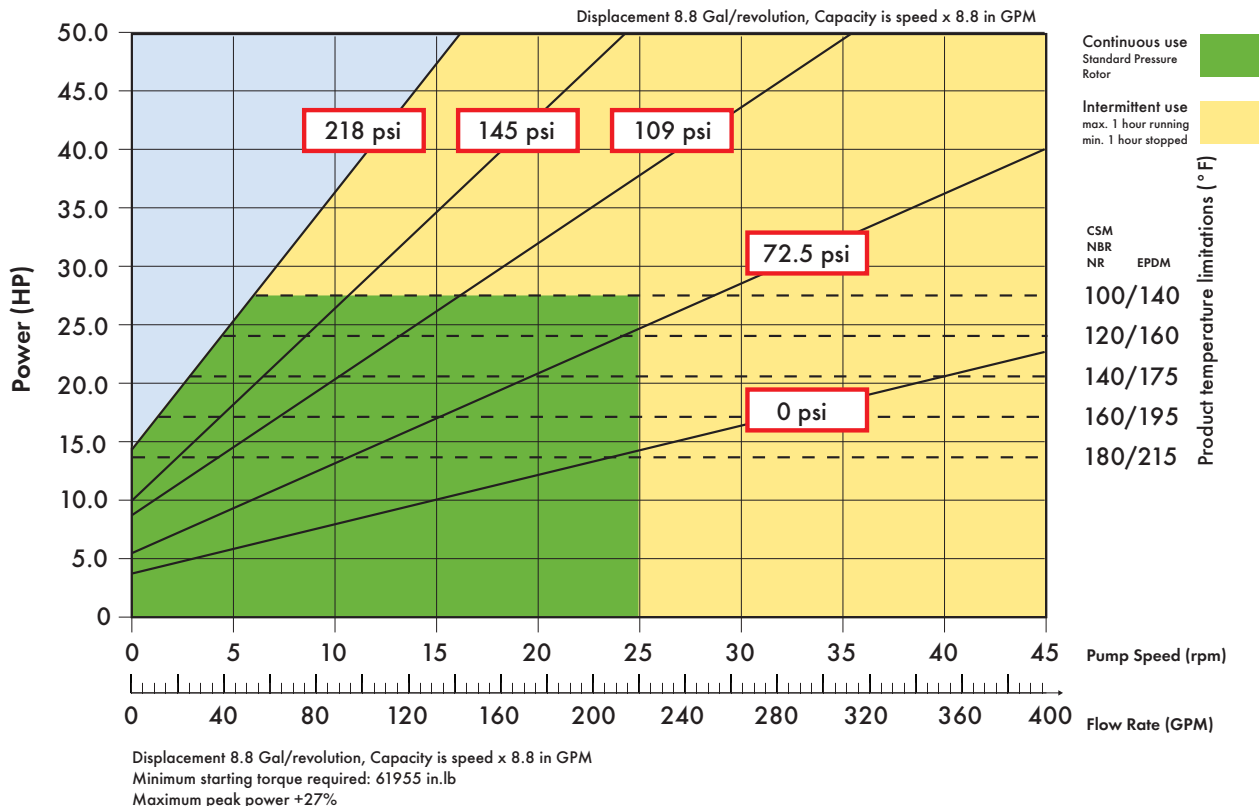

Shimming Curve

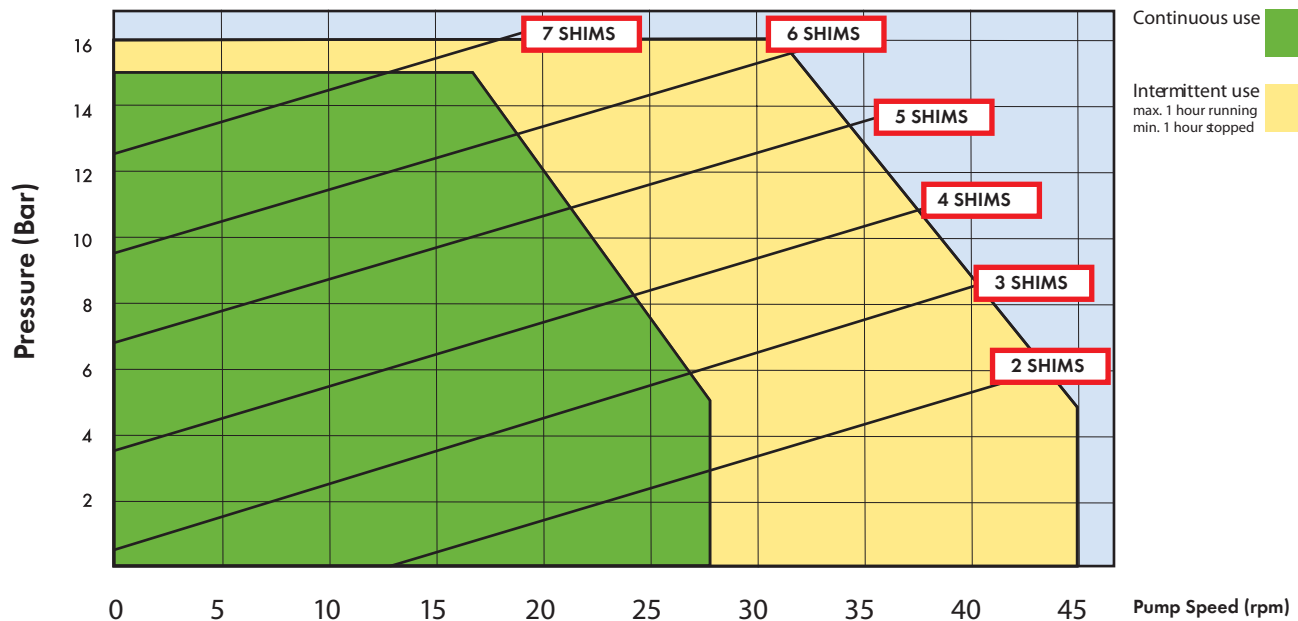


VERDERFLEX VF125

Technical Data Sheet

VERDERFLEX®

General Arrangement Layout

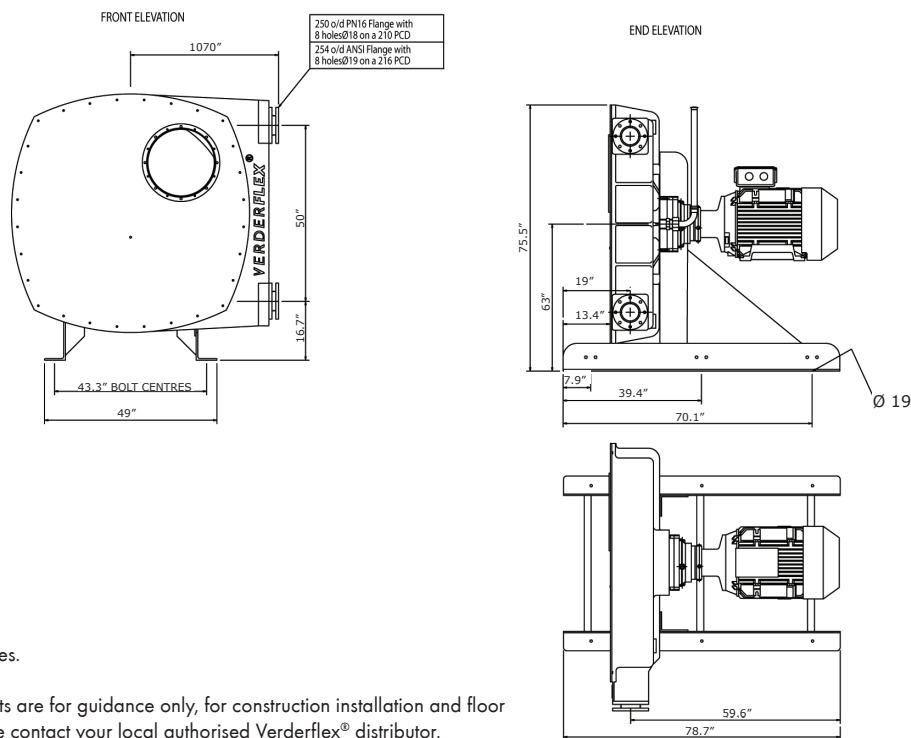

All dimensions are in inches.

All dimensions and weights are for guidance only, for construction installation and floor mounting drawings please contact your local authorised Verderflex® distributor.

Standard Materials of Construction

Description	Material	Weight (lbs)	Paint Detail
Pump Housing	Cast Iron (GG25)	2,987	RAL 6018 (Green)
Front Cover	Mild Steel (BS EN10.025:1993/5275)	308	RAL 7021 (Black)
Rotor	Cast Iron (GG25)	650	
Rotor Shoes	Aluminium (6082T6)	176	
Flanges	Mild Steel (BS EN.10.025 FE430A)	33 each	
Inserts	Stainless Steel (316L) Polypropylene P.V.D.F	17.6	
Base Frame	Powder Coated Carbon Steel	463	RAL 7035 (Grey)
Lubricant	Verderlube - Glycerine based compound Verdersil - Silicone oil	21 gallons	
Hose	NR, NBR, CSM and EPDM	95	
Close coupled pump unit - "Flat Pack"		5952	

VERDERFLEX

Unit 3, California Drive, **TEL** +44 (0)1924 221 020
 Castleford WF10 5QH **FAX** +44 (0)113 222 0291
 United Kingdom **MAIL** info@verderflex.com
WEB www.verderflex.com

AT Wien **BE** Aartselaar **BG** Sofia **CH** Basel **CN** Shanghai **CZ** Praha **DE**
 Haan **FR** Eragny s/Oise **GB** Castleford **HU** Budapest **IT** Torre Boldone
JP Tokyo **NL** Groningen/Vleuten **PL** Katowice **RO** Bucuresti/Sibiu
RU St Petersburg **SK** Bratislava **US** Newtown/Macon **ZA** Northriding